



PS-0299

Product Description:


P-SHIELD® PS-0299 is a single coated electrically conductive acrylic transfer adhesive with a 54# dense kraft siliconized paper release liner.

Construction / Properties:

Property	Value	Test Method
Color	Brown to Gray	Visual
Total Thickness (excluding liners)	0.05mm	QSP-726
Adhesive Type	Acrylic	--
Adhesive Coat Weight	50 gsm	QSP-724
Acrylic Adhesion	800 g/25mm (15 minutes) 2280 g/25mm (72 hours)	QSP-722
Z-Axis Resistance	<0.4 Ω /in ²	QSP-741
Continuous Use Conditions	-10 - 80 C	QSP-754
Maximum Operating Temperatures	-20 - 120 C	QSP-754
Flammability Rating (as cured)	V-0	UL 94

Features:

- Excellent Z-Axis Conductivity
- Superior Converting Properties
- Low VOC
- Good Shear Strength
- RoHS and HF Compliant

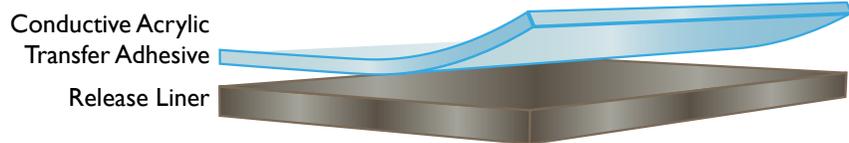

Specific tests should be performed by the end user to determine the product stability for the particular application.

For Additional Information:

E-mail: sales@polymerscience.com
Toll Free: +1 888.533.7004
Web: www.polymerscience.com
Revision: 032519