



## PS-1347

### Product Description:


P-SHIELD® PS-1347 is a double coated, nickel copper plated electrically conductive fabric with an electrically conductive acrylic pressure sensitive adhesive to allow conductivity in the x, y and z-plane.

### Construction / Properties:

Property	Value	Test Method
Color	Gray	Visual
Total Thickness (excluding liners)	0.25mm	QSP-726
Fabric Type	Woven	--
Surface Resistivity	<0.2 $\Omega$ /sq	QSP-741
Z-Axis Resistance	<0.1 $\Omega$ /in <sup>2</sup>	QSP-741
Acrylic Adhesion	>800 g/25mm	QSP-722
Shielding Effectiveness (30 MHz - 1.5GHz)	70 - 80 dB	--
Recommended Application Specificaiton	2 kg/square inch for 2 seconds	--
Continuous Use Conditions	-10 - 80 C	QSP-754

### Features:

- Superior Conducting Properties
- Excellent Conformability
- Excellent Tack
- Excellent Adhesion to Low Surface Energy Substrates
- Excellent Shielding Effectiveness
- RoHS and HF Compliant

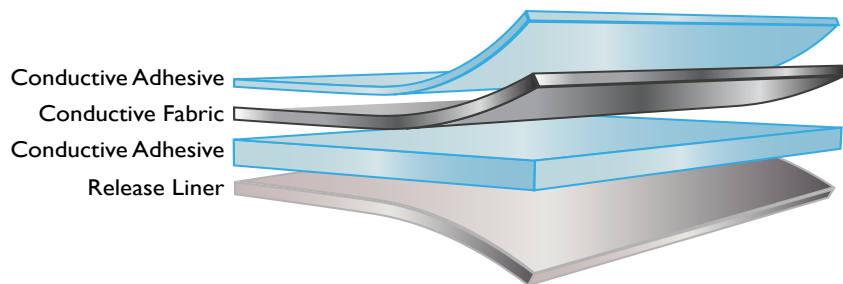

Specific tests should be performed by the end user to determine the product stability for the particular application.

### For Additional Information:

E-mail: [sales@polymerscience.com](mailto:sales@polymerscience.com)  
Toll Free: +1 888.533.7004  
Web: [www.polymerscience.com](http://www.polymerscience.com)  
Revision: 032619