



## PS-1374

### Product Description:


P-SHIELD® PS-1374 is a single coated, nickel copper plated electrically conductive woven fabric with a conductive acrylic adhesive for fixation to the component to be shielded or grounded.

### Construction / Properties:

Property	Value	Test Method
Total Thickness (excluding liners)	0.045 mm	QSP-726
Color	Gray	Visual
Acrylic Adhesion	1300 g/25mm	QSP-722
Surface Resistivity	<0.1 $\Omega$ /sq (Fabric Side) <0.1 $\Omega$ /sq (Adhesive Side)	QSP-741
Z-Axis Resistance	<0.08 $\Omega$ /in <sup>2</sup>	QSP-741
Shielding Effectiveness (30 MHz - 1.5GHz)	70 - 80 dB	--
Recommended Application Specification	2 kg/square inch for 2 seconds	--
Continuous Use Conditions	-10 - 80 C	QSP-754

### Features:

- Superior Converting Properties
- Excellent Conformability
- Excellent Shielding Effectiveness
- RoHS and HF Compliant

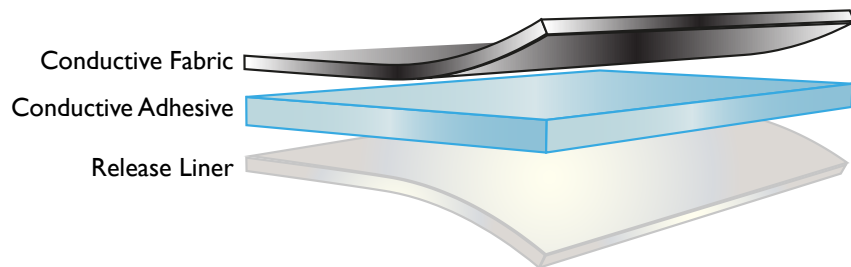

Specific tests should be performed by the end user to determine the product stability for the particular application.

### For Additional Information:

E-mail: [sales@polymerscience.com](mailto:sales@polymerscience.com)  
Toll Free: +1 888.533.7004  
Web: [www.polymerscience.com](http://www.polymerscience.com)  
Revision: 032719