



PS-1652

Product Description:

P-THERM® PS-1652 is a double coated, thermally conductive acrylic adhesive with a fiberglass carrier and siliconized paper release liner.

Construction / Properties:

General	Property	Value	Test Method
	Color	White	Visual
	Total Thickness	0.25 mm	ASTM D374
	Carrier Type	Fiberglass	--
	Acrylic Adhesion	2270 g/25mm	QSP-722
	Continuous Use Conditions	-40 - 85 C	QSP-754

Physical	Property	Value	Test Method
	Composite X-Y Thermal Conductivity	0.55 W/m K	ASTM D5470


* 20% thermal conductivity tested at 20% strain.

Features:

- Non-Silicone
- High Temperature Resistance
- Low Stress on Components
- Shock Absorbing
- Low VOC
- RoHS and HF Compliant

Applications:

- Computers
- Smartphones
- Tablets
- Infotainment & Navigation Systems

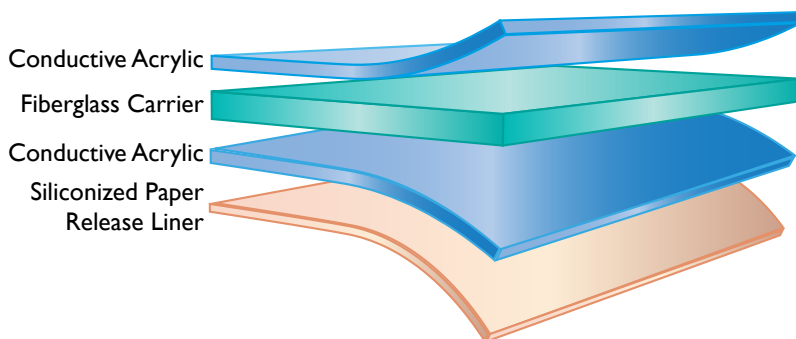

Specific tests should be performed by the end user to determine the product stability for the particular application.

For Additional Information:

E-mail: sales@polymerscience.com
Toll Free: +1 888.533.7004
Web: www.polymerscience.com
Revision: 040621