



PS-1747

Product Description:

P-SHIELD® PS-1747 is a single coated, electrically conductive heat activated transfer adhesive.


Construction / Properties:

| Property | Value | Test Method |
|--------------------|---|-------------|
| Total Thickness | 0.015mm +/- 0.005mm 0.030mm +/- 0.01mm | QSP-726 |
| Color | Gray | -- |
| Product Width | 1050mm | QSP-726 |
| Z-Axis Resistance | $\leq 0.05 \Omega/\text{in}^2$ | QSP-741 |
| Bonding Conditions | 80 - 120 C | -- |

Features:

- Superior Converting Properties
- Excellent Conformability
- Superior Durability
- Excellent Shielding Effectiveness
- RoHS and HF Compliant

Conductive Heat
Activated Adhesive
Release Liner

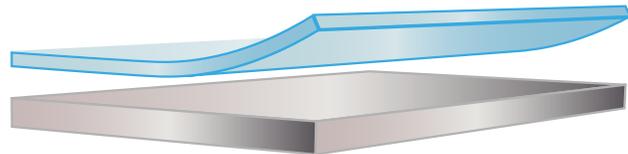

Specific tests should be performed by the end user to determine the product stability for the particular application.

For Additional Information:

E-mail: sales@polymerscience.com
Toll Free: +1 888.533.7004
Web: www.polymerscience.com
Revision: 040124