



PS-2354

Product Description:


P-SHIELD® PS-2354 is a single coated, nickel and copper plated conductive woven fabric with a heat activated adhesive.

Construction / Properties:

Property	Value	Test Method
Total Thickness	0.028mm +/- 0.006mm	QSP-726
Product Width	520mm	QSP-726
Color	Gray	Visual
Fabric	Copper Nickel Plated Polyester	--
Surface Resistivity	<0.05 Ω /sq (Fabric Side)	QSP-74 I
Activation Temperature of Adhesive	55 - 65 C	--
Shielding Effectiveness (10 MHz - 1GHz)	70 - 80 dB	--

Features:

- Superior Converting Properties
- Excellent Conformability
- Superior Durability
- Good Shielding Effectiveness
- RoHS and HF Compliant

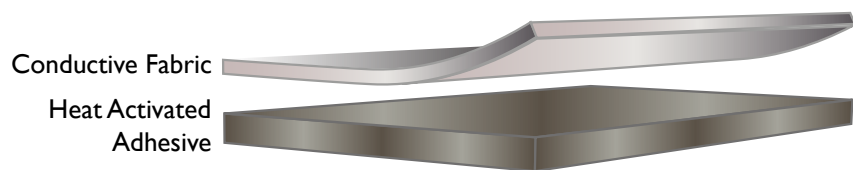

Specific tests should be performed by the end user to determine the product stability for the particular application.

For Additional Information:

E-mail: sales@polymerscience.com
Toll Free: +1 888.533.7004
Web: www.polymerscience.com
Revision: 032719