



PS-2362

Product Description:

P-SHIELD® PS-2362 is a single coated, electrically conductive low activation temperature heat activated adhesive.


Construction / Properties:

Property	Value	Test Method
Color	Gray	--
Adhesive Coat Weight	1063 gsm, 98 gsm	QSP-724
Acrylic Adhesion	1000 g/25mm +/- 200 g/25mm	QSP-722
Thickness Tolerance	+/- 0.02mm	--
Product Width	1070mm	QSP-726
Z-Axis Resistance	$\leq 0.05 \Omega/\text{in}^2$	QSP-741
Activation Temperature of Adhesive	60 C	--

Features:

- Superior Converting Properties
- Excellent Conformability
- Superior Durability
- Excellent Shielding Effectiveness
- RoHS and HF Compliant

Low Activation
Temperature Heat
Activated Adhesive
Release Liner

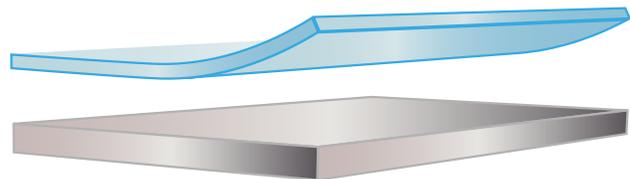

Specific tests should be performed by the end user to determine the product stability for the particular application.

For Additional Information:

E-mail: sales@polymerscience.com
Toll Free: +1 888.533.7004
Web: www.polymerscience.com
Revision: 032719