



# Technical Data Sheet

General Industrial

## PS-2924-xxTBL

### Product Description:

PS-2924-xxTBL is a soft nonconductive silicone foam used for sealing and shock absorption in automotive, aerospace, consumer electronics and industrial applications. PS-2924-xxTBL is supplied with a removable polyester carrier for added support during die cutting and handling.


### Construction / Properties:

Property	Value			Test Method
Thickness(mm)	1.59 - 12.7			QSP-726
Color	Black			--
Polyester Thickness (mm)	0.057±0.03			QSP-726
Hardness (Shore 00)	34			ASTM D2240
Density (kg/m <sup>3</sup> )	275±40			ASTM D1056
Water Absorption (72 hour submersion)	48%			--
Tensile Strength (kPa)	≤3.18mm	>3.18mm≤7mm	>7mm	ASTM D412
	≥180	≥150	≥140	
Elongation (%)	≥100			ASTM D1056
Tear Strength (g/mm <sup>2</sup> )	164			ASTM D624
Compression Set (%)	≤5 at 100 C / ≤5 at 175 C			ASTM D1056
Total Mass Loss (@125 C/24 hrs)	0.48%			ASTM E595**
Flame Resistance	V0			UL94
Thermal Conductivity (W/m K)	0.08			ASTM C518
Dielectric Breakdown Strength (kV/mm)	4.7			ASTM D412
Volume Resistivity (Ω cm)	1.73 x 10 <sup>14</sup>			ASTM D257
Continuous Use Conditions	-55 - 200 C			QSP-754

\*\*Tested at atmospheric pressure

## Features:

- Good Resistance to Compression Set
- Good Chemical Resistance
- Highly Elastic
- Flame Retardant
- RoHS and HF Compliant

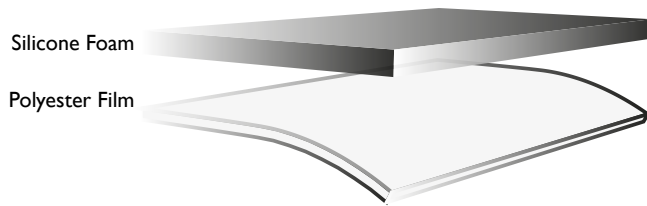

Specific tests should be performed by the end user to determine the product stability for the particular application.

### For Additional Information:

E-mail: [sales@polymerscience.com](mailto:sales@polymerscience.com)  
Toll Free: +1 888.533.7004  
Web: [www.polymerscience.com](http://www.polymerscience.com)  
Revision: 063023