

Technical Data Sheet

General Industrial

PS-0253

Product Description:


PS-0253 is a polyester film that has been coated on each side with an acrylic adhesive. PS-0253 is supplied with a 55# C2S differential release liner.

Construction / Properties:

Property	Value	Test Method
Total Thickness	0.125mm	QSP-726
Polyester Thickness	0.075mm	QSP-726
Adhesive Thickness (each side)	0.025mm	QSP-726
Thickness Tolerance	+/- 10%	--
Adhesion to SUS	2250g _f /25mm	QSP-722
FDA Compliance under the following regulations:	21 CFR 175.105 21 CFR 176.170 21 CFR 176.180 16 CFR 1500.3(C)(4) 16 CFR 1500.3©(2)(I)	

Features:

- Solvent Free
- Good Shear Strength
- Excellent for Hand Application
- Superior for Automated Dispensing Applications
- Excellent Adhesion to a Variety of Substrates

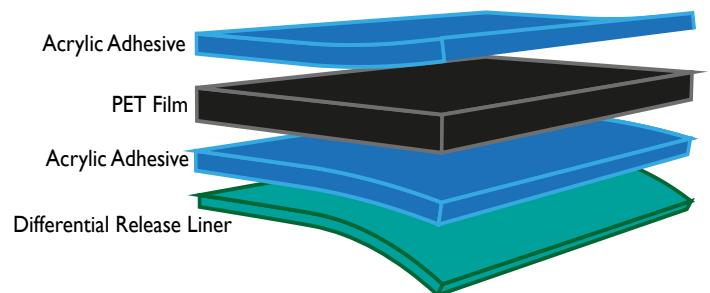

Specific tests should be performed by the end user to determine the product stability for the particular application.

For Additional Information:

E-mail: sales@polymerscience.com
Toll Free: +1 888.533.7004
Web: www.polymerscience.com
Revision: 092223

