



## PS-2295

### Product Description:


PS-2295 is a single coated silicone membrane with a 125 micron removable polyester film carrier.

### Construction / Properties:

| Property                           | Value          | Test Method |
|------------------------------------|----------------|-------------|
| Total Thickness (excluding liners) | 0.5mm          | QSP-726     |
| Carrier Type                       | Polyester Film | --          |
| Carrier Thickness                  | 0.125mm        | QSP-726     |
| Specific Gravity                   | 1.14           | ASTM D792   |
| Hardness (Shore A)                 | 59             | QSP-73 I    |
| Tensile Strength, Yield            | 9.6 MPa        | ASTM D882   |
| Elongation at Break                | >460%          | ASTM D882   |

### Features:

- Converter Friendly
- Good Dimensional Stability
- Flexible
- Waterproof

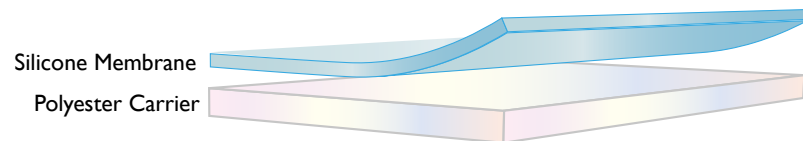

Specific tests should be performed by the end user to determine the product stability for the particular application.

### For Additional Information:

E-mail: [sales@polymerscience.com](mailto:sales@polymerscience.com)  
Toll Free: +1 888.533.7004  
Web: [www.polymerscience.com](http://www.polymerscience.com)  
Revision: 092223