



## PS-2749

### Product Description:


P-SHIELD® PS-2749 is a single coated, electrically conductive heat activated transfer adhesive.

### Construction / Properties:

Property	Value	Test Method
Total Thickness	0.015mm +/- 0.003mm 0.03mm +/- 0.006mm	QSP-726
Color	Gray	--
Product Width	1050mm	QSP-726
Z-Axis Resistance	$\leq 0.05 \Omega/\text{in}^2$	QSP-741
Activation Temperature	50 - 70 C	--

### Features:

- Superior Converting Properties
- Excellent Conformability
- Superior Durability
- Excellent Shielding Effectiveness
- RoHS and HF Compliant

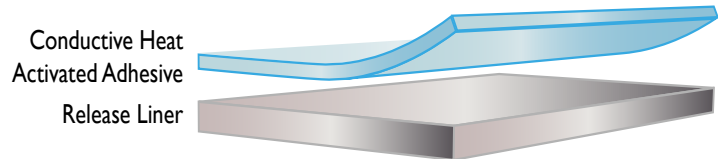

Specific tests should be performed by the end user to determine the product stability for the particular application.

### For Additional Information:

E-mail: [sales@polymerscience.com](mailto:sales@polymerscience.com)  
Toll Free: +1 888.533.7004  
Web: [www.polymerscience.com](http://www.polymerscience.com)  
Revision: 062723