



PS-2757

Product Description:


P-SHIELD® PS-2757 is an electrically conductive acrylic pressure sensitive adhesive to allow conductivity in the x, y and z-plane when tested on a 35 micron copper foil.

Construction / Properties:

Property	Value	Test Method
Total Thickness	0.015 mm ± 0.01 mm	QSP-726
Surface Resistivity	<0.15 Ω/sq	QSP-741
Z-Axis Resistance	<0.15 Ω/in ²	QSP-741
Color	Gray	Visual
Adhesive Peel Strength (to SUS)	>600 g/25mm	QSP-722
Recommended Application Specification	2 kg/square inch for 2 seconds	--
Continuous Use Conditions	-10 – 80 C	QSP-754

Features

- Superior Converting Properties
- Excellent Conformability
- Good Tack
- Good Adhesion to Low Surface Energy Substrates
- RoHS and HF Compliant

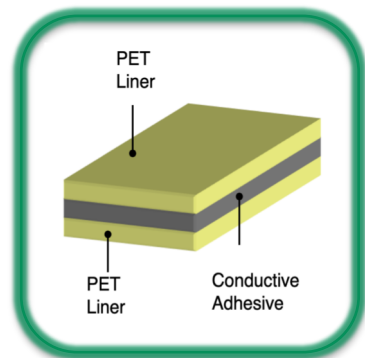

Specific tests should be performed by the end user to determine the product suitability for the particular application.

For Additional Information:

E-Mail: sales@polymerscience.com

Toll Free: +1 888.533.7004

Web: www.polymerscience.com

Revision: 041520