

Technical Data Sheet

P-DERM®

PS-2066

Product Description:


P-DERM® PS-2066 is a trilaminate consisting of a perforated high adhesion silicone gel adhesive, polyurethane film and medical pressure sensitive acrylic adhesive. PS-2066 is supplied with a perforated 75 micron polycarbonate liner on the silicone gel adhesive side and a 30 micron non-perforated siliconized white polypropylene liner on the acrylic side of the construction.

Construction / Properties:

Property	Value	Test Method
Thickness (excluding liners)	0.22mm	QSP-726
Silicone Gel Coat Weight	150 gsm	QSP-724
Carrier Type	Polyurethane Film	
Carrier Thickness	25 micron	QSP-726
Acrylic Coat Weight	37 gsm	QSP-724
Silicone Adhesion	1.2 N/25mm	QSP-723
Acrylic Adhesion	3.5 N/25mm	QSP-722
Perforation Hole Size / Open Area	1.5mm /17%	
Continuous Use Conditions	10 - 70 C	QSP-754
	Cytotoxicity: Pass	
Biocompatibility	Primary Dermal: Pass	ISO 10993
	Buehler Sensitization: Pass	
Recommended Sterilization Method	Ethylene Oxide	

Features:

- Excellent Instantaneous Tack
- Atraumaticc Removal from Skin
- Hypoallergenic
- Ability to be Removed and Repositioned
- Excellent Converting Properties

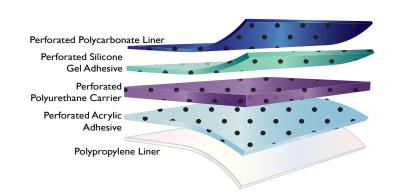

Specific tests should be performed by the end user to determine the product stability for the particular application.

For Additional Information:

E-mail: sales@polymerscience.com

Toll Free: +I 888.533.7004

Web: www.polymerscience.com

Revision: 092319

