

Technical Data Sheet

P-SHIELD®

PS-0429

Product Description:


P-SHIELD® PS-0429 is an electrical insulating polyimide film coated with a removable silicone pressure sensitive adhesive for applications where higher temperature, chemical shielding and electrically insulative performance is desired.

Construction / Properties:

Property	Value	Test Method
Total Thickness (without liners)	0.075 mm	QSP-726
Color	Amber	Visual
Adhesive Peel Strength (to SUS)	40 g/25mm ± 29 g./25mm	QSP-722
Adhesive Pell Strength (to Copper)	45 g/25mm ± 29 g./25mm	QSP-722
Continuous Use Temperatures	-10 - 80 C	QSP-754

Features:

- Excellent Conformability
- Economical Solution to Heat Dissipation Applications
- Clean Removal after adhesion
- RoHS and HF Compliant

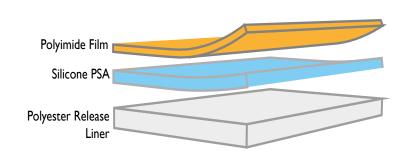

Specific tests should be performed by the end user to determine the product stability for the particular application.

For Additional Information:

E-mail: sales@polymerscience.com

Toll Free: +I 888.533.7004

Web: www.polymerscience.com

Revision: 031524

