

PS-1901

Product Description:

P-THERM® PS-1901 is a non-silicone based thermally conductive gap filler.

Construction / Properties:


Property	Value	Test Method
Color	Gray	Visual
Thickness Range	0.5mm - 5.0mm	ASTM D374
Thermal Conductivity	11 W/m K	ASTM D5470
Thermal Impedance at 1mm@40 psi	0.10 C in ² /W	ASTM D5470
Dielectric Breakdown Strength	>6 kV _{AC} /mm	ASTM D149
Volume Resistivity	9.6x10 ¹² Ω cm	ASTM D257
Hardness (Shore 00)	55 - 75	ASTM D2240
Continuous Use Conditions	-40 - 150 C	QSP-754
Flammability Rating	V-0	UL 94 (modified)*

* In-house test method

Features:

- Good Thermal Conductivity
- Excellent Converting Properties
- RoHS and HF Compliant

Non-Silicone TIM

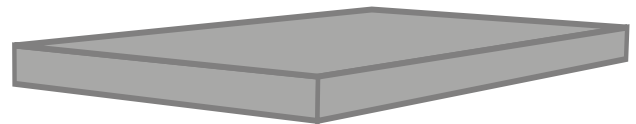

Specific tests should be performed by the end user to determine the product stability for the particular application.

For Additional Information:

E-mail: sales@polymerscience.com
Toll Free: +1 888.533.7004
Web: www.polymerscience.com
Revision: 091224

