



PS-2288

Product Description:


PS-2288 is a single coated silicone membrane with a 125 micron removable polyester film carrier.

Construction / Properties:

Property	Value	Test Method
Total Thickness (excluding liners)	0.24mm	QSP-726
Carrier Type	Polyester Film	--
Carrier Thickness	0.125mm	QSP-726
Specific Gravity	1.14	ASTM D792
Hardness (Shore A)	59	QSP-73 I
Tensile Strength, Yield	9.6 MPa	ASTM D882
Elongation at Break	>460%	ASTM D882

Features:

- Converter Friendly
- Good Dimensional Stability
- Flexible
- Waterproof

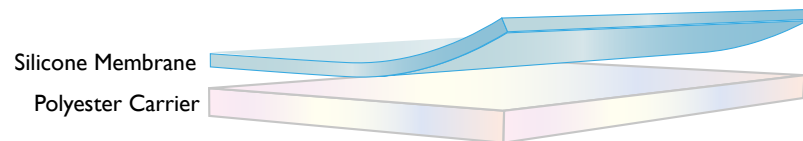

Specific tests should be performed by the end user to determine the product stability for the particular application.

For Additional Information:

E-mail: sales@polymerscience.com
Toll Free: +1 888.533.7004
Web: www.polymerscience.com
Revision: 092223