

Technical Data Sheet

General Industrial

PS-2926

Product Description:

PS-2926 is a firm nonconductive silicone foam used for sealing and shock absorption in automotive, aerospace, consumer electronics and industrial applications.

Construction / Properties:

Property	Value			Test Method
Thickness(mm)	1.59 - 25.4			QSP-726
Color	Gray, Black			--
Hardness (Shore 00)	25			ASTM D2240
Density (kg/m ³)	250±40			ASTM D1056
Water Absorption (72 hour submersion)	12%			--
Tensile Strength (kPa)	≤3mm	>3mm≤7mm	>7mm	ASTM D412
	≥170	≥150	≥100	
Elongation (%)	≥70	≥60	≥60	ASTM D1056
Tear Strength (g/mm ²)	128			ASTM D624
Compression Set (%)	≤5 at 100 C / ≤5 at 175 C			ASTM D1056
Total Mass Loss (@125 C/24 hrs)	0.54%			ASTM E595**
Flame Resistance	V0			UL94
Thermal Conductivity (W/m K)	0.17			ASTM C518
Dielectric Breakdown Strength (kV/mm)	4.00			ASTM D412
Volume Resistivity (Ω cm)	5.76 × 10 ¹⁴			ASTM D257
Continuous Use Conditions	-55 - 200 C			QSP-754






**Tested at atmospheric pressure

Features:

- Good Resistance to Compression Set
- Good Chemical Resistance
- Protects against Solid Contaminants: IP6x
- Highly Elastic
- Flame Retardant
- Low Water Absorption
- RoHS and HF Compliant
- Shelf Life: 10 years



Silicone Foam

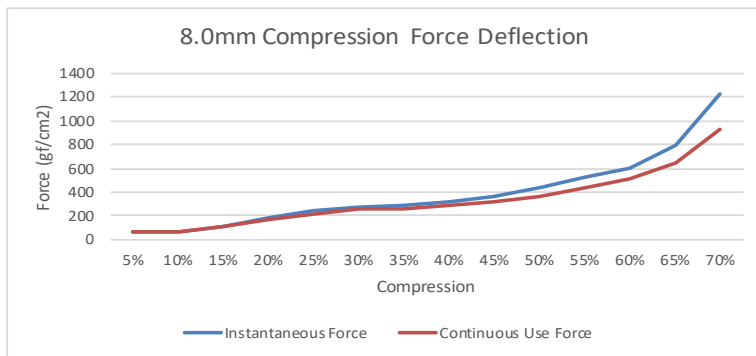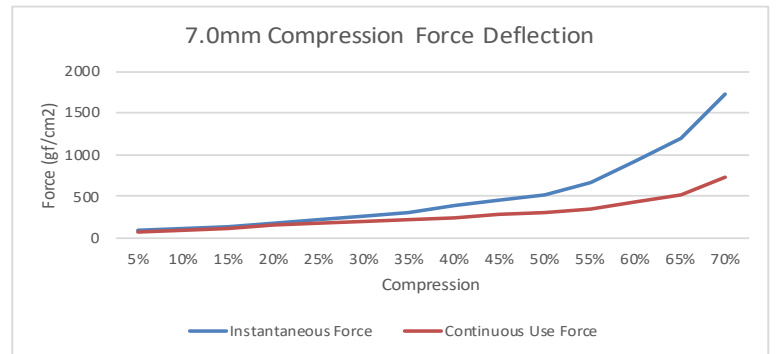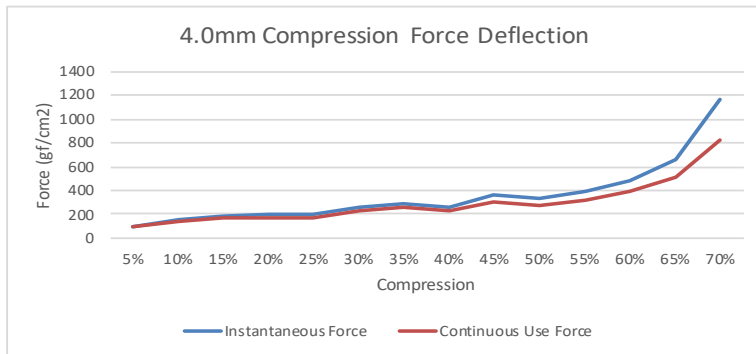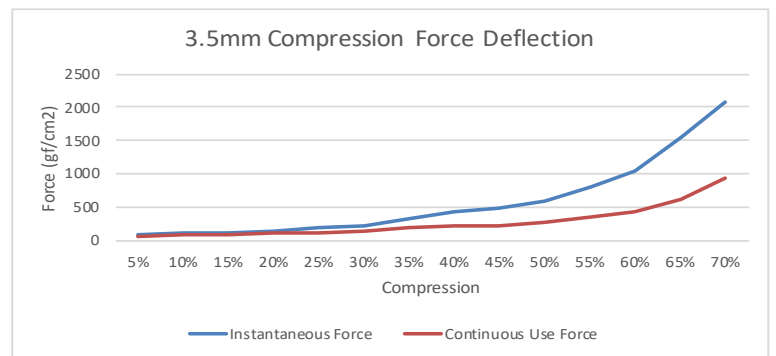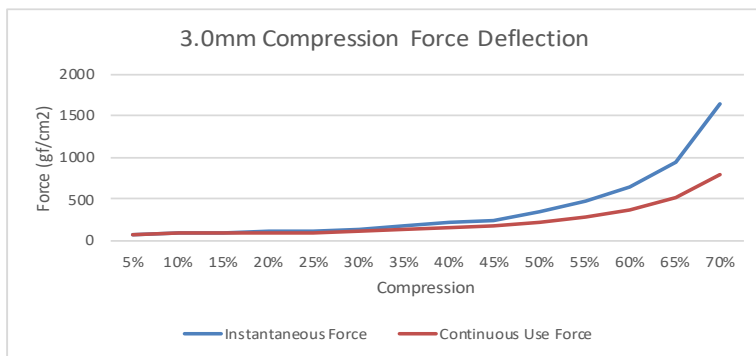

Specific tests should be performed by the end user to determine the product stability for the particular application.

For Additional Information:

E-mail: sales@polymerscience.com
Toll Free: +1 888.533.7004
Web: www.polymerscience.com
Revision: 081624