



## PS-328 I

### Product Description:


P-SHIELD® PS-328I is a copper foil plated with a layer of nickel on each side.

### Construction / Properties:

Property	Value	Test Method
Color	Gray	Visual
Total Thickness	0.010mm +/- 0.003mm	QSP-726
Tensile Strength	<185 MPa	ASTM E345
Surface Resistivity	<0.07 $\Omega$ /sq	QSP-741
Z-Axis Resistance	<0.07 $\Omega$ /in <sup>2</sup>	QSP-741
Shielding Effectiveness (30 MHz - 1.5GHz)	>90 dB	--
Continuous Use Conditions	-10 - 80 C	QSP-754

### Features:

- Excellent Conductive Properties
- Good Resistance to Corrosion
- Excellent Shielding Effectiveness
- RoHS and HF Compliant

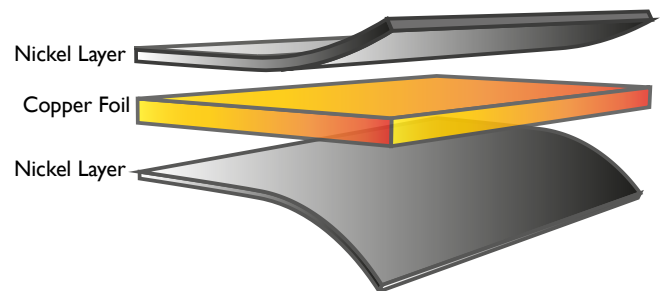

Specific tests should be performed by the end user to determine the product stability for the particular application.

### For Additional Information:

E-mail: [sales@polymerscience.com](mailto:sales@polymerscience.com)  
Toll Free: +1 888.533.7004  
Web: [www.polymerscience.com](http://www.polymerscience.com)  
Revision: 060724