



PS-3294

Product Description:


P-SHIELD® PS-3294 is a flame resistant electrically conductive acrylic pressure sensitive adhesive that offers superior adhesion to a wide variety of substrates and conductivity in the z-axis.

Construction / Properties:

| Property | Value | Test Method |
|------------------------------|-------------------------|-------------|
| Thickness (excluding liners) | 0.07 mm | QSP-726 |
| Color | Gray | Visual |
| Adhesion (to SUS) | ≥6 N/25mm | QSP-722 |
| Static Shear Strength | ≥12 hours | ASTM D3654 |
| Z-Axis Resistivity | <0.07 Ω/in ² | QSP-741 |
| Flame Rating | Pass | UL510 |
| Continuous Use Conditions | -10 - 80 C | QSP-754 |

Features:

- Excellent Tack
- Excellent Adhesion to Low Surface Energy Substrates
- RoHS and HF Compliant

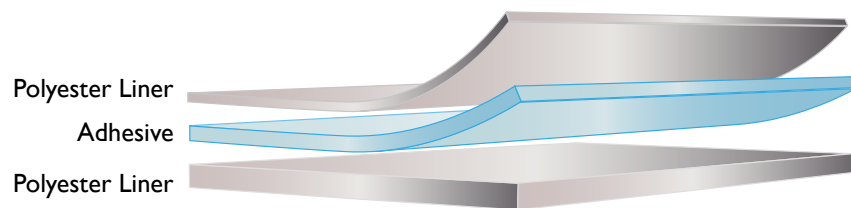

Specific tests should be performed by the end user to determine the product stability for the particular application.

For Additional Information:

E-mail: sales@polymerscience.com
Toll Free: +1 888.533.7004
Web: www.polymerscience.com
Revision: 031924