

Technical Data Sheet

General Industrial

PS-I 340

Product Description:


PS-I340 is a differential coated polyester film. The coated two side tape utilizes an acrylic adhesive on one side of the polyester carrier and a silicone pressure sensitive adhesive on the reverse side of the film carrier.

Construction / Properties:

Property	Value	Test Method
Total Thickness	0.10mm	QSP-726
Acrylic Adhesive Thickness	0.030mm	QSP-726
Polyester Carrier Thickness	0.025mm	QSP-726
Silicone Adhesive Thickness	0.045mm	QSP-726
Acrylic PSA Liner	0.050mm white polyester	Visual
Silicone PSA Liner	0.050mm clear polyester	Visual
Adhesive Peel Strength	Acrylic PSA 1300 g/25mm Silicone PSA 1100 g/25mm	QSP-722
Tensile Strength, Yield	7000 g/in	ASTM D882
Continuous Use Conditions	<120 C	QSP-754

Features:

- Excellent Tack
- Good Resistance to Heat and Humidity
- Excellent Adhesion to Low Surface Energy Substrates

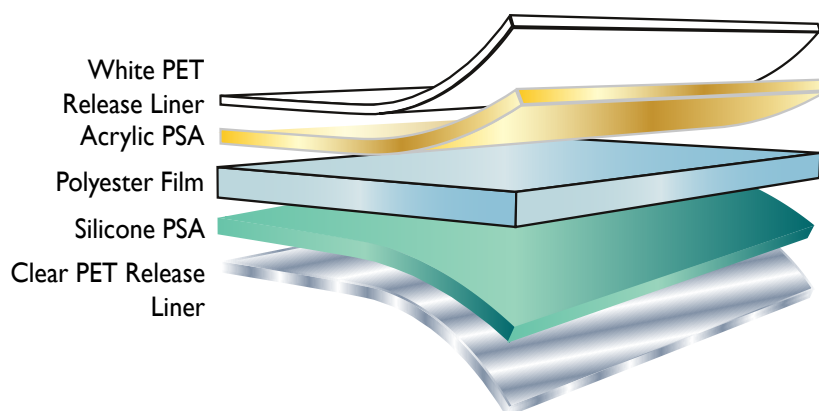

Specific tests should be performed by the end user to determine the product stability for the particular application.

For Additional Information:

E-mail: sales@polymerscience.com
Toll Free: +1 888.533.7004
Web: www.polymerscience.com
Revision: 052125