

PS-3066

Product Description:


P-DERM® PS-3066 is a single coated adhesive tape consisting of a polyurethane adhesive and nonwoven polyester when high breathable is needed. PS-3066 is supplied with a 54lb dense kraft siliconized release liner.

Construction / Properties:

Property	Value	Test Method
Total Thickness	0.42mm	QSP-726
Adhesive Coat Weight	100 gsm	QSP-724
Carrier Type	Nonwoven Polyester	--
Carrier Thickness	320 micron	QSP-726
Adhesion	>1.0 N/25mm	QSP-723
Moisture Vapor Transmission Rate	>1000 g/m ² 24 hrs	QSP-727
Continuous Use Conditions	10 - 80 C	QSP-754
Biocompatibility	Cytotoxicity: Pass	ISO 10993
Recommended Sterilization Method	Gamma Ethylene Oxide	--

Features:

- Excellent Instantaneous Tack
- Hypoallergenic
- Excellent Converting Properties

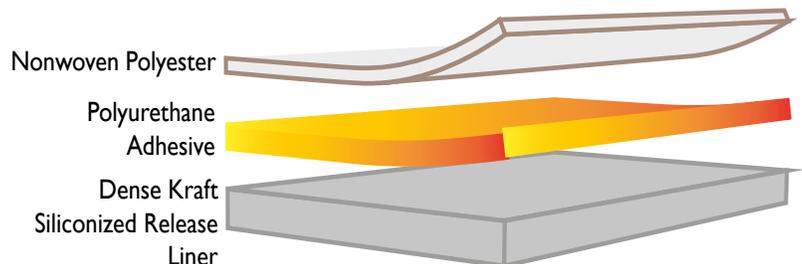

Specific tests should be performed by the end user to determine the product stability for the particular application.

For Additional Information:

E-mail: sales@polymerscience.com
Toll Free: +1 888.533.7004
Web: www.polymerscience.com
Revision: 031825