



PS-2714

Product Description:


P-SHIELD® PS-2714 is an electrically conductive aluminum foil that has been coated with an electrically conductive acrylic adhesive.

Construction / Properties:

Property	Value	Test Method
Color	Aluminum	Visual
Total Thickness (excluding liners)	0.14mm	QSP-726
Adhesive Type	Acrylic	--
Acrylic Adhesion	>1200 g/25mm	QSP-722
Z-Axis Resistance	<0.06 Ω/in^2	QSP-741
Continuous Use Conditions	-45 - 85 C	QSP-754
Shielding Effectiveness (10 MHz - 1 GHz)	>60 dB	--
Recommended Application Specification	2 kg/square inch for 2 seconds	--

Features:

- Good Tack
- Excellent Conductive Properties
- Good Resistance to Heat and Humidity
- Good Adhesion to Low Surface Energy Substrates
- Excellent Shielding Effectiveness
- RoHS and HF Compliant

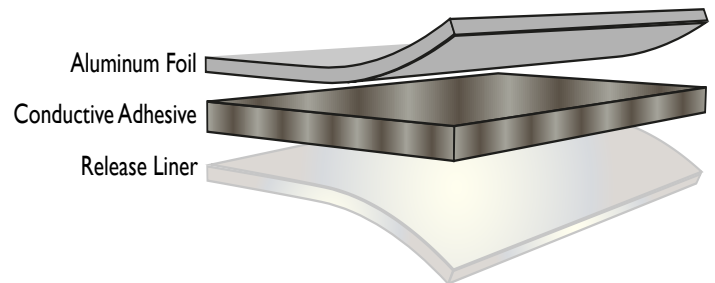

Specific tests should be performed by the end user to determine the product stability for the particular application.

For Additional Information:

E-mail: sales@polymerscience.com
Toll Free: +1 888.533.7004
Web: www.polymerscience.com
Revision: 051826