Technical Data Sheet

P-THERM®

PS-2855

Product Description:

P-THERM® PS-2855 is a soft silicone based thermally conductive gap filler with an embedded fiberglass support and 125 micron removable polyester carrier.


Construction / Properties:

	Property	Value	Test Method
General	Color	Yellow	Visual
	Thickness Range	0.5 mm - 5.0 mm	ASTM D374
	Reinforcement Carrier Type	Fiberglass	--
	Density (g/cc)	3.135	ASTM D792
	Heat Capacity (J/g K) @ 50 C	0.542	ASTM E1269
	Total Mass Loss (@125C/24 hrs)	0.1%	ASTM E595**
	Flammability Rating	V-0	UL-94****
	Hardness (Shore 00)	29	ASTM D2240
	Continuous Use Conditions	-60 - 200 C	QSP-754

	Property	Value	Test Method
Electrical	Dielectric Breakdown Strength (kV/mm)	12.65	ASTM D149
	Volume Resistivity (ohm-cm)	1.49E+13	ASTM D257
	Dielectric Constant @ 1.0mm	8.9 (1 kHz) / 8.15 (1 MHz)	ASTM D150

	Property	Value			Test Method
Thermal	Thermal Conductivity	5 W/m K			ASTM D5470*
	Thermal Performance vs. Strain				
	Deflection (% Strain)	10	20	30	ASTM D5470***
	Thermal Impedance (K cm²/W) @ 1.5mm	3.74	3.04	2.65	

* Thermal conductivity tested at 20% strain.
** Tested at atmospheric pressure
*** Values tested include interfacial thermal resistance: Application performance is directly related to surface roughness, flatness and pressure applied.
**** Internal Method based on UL-94

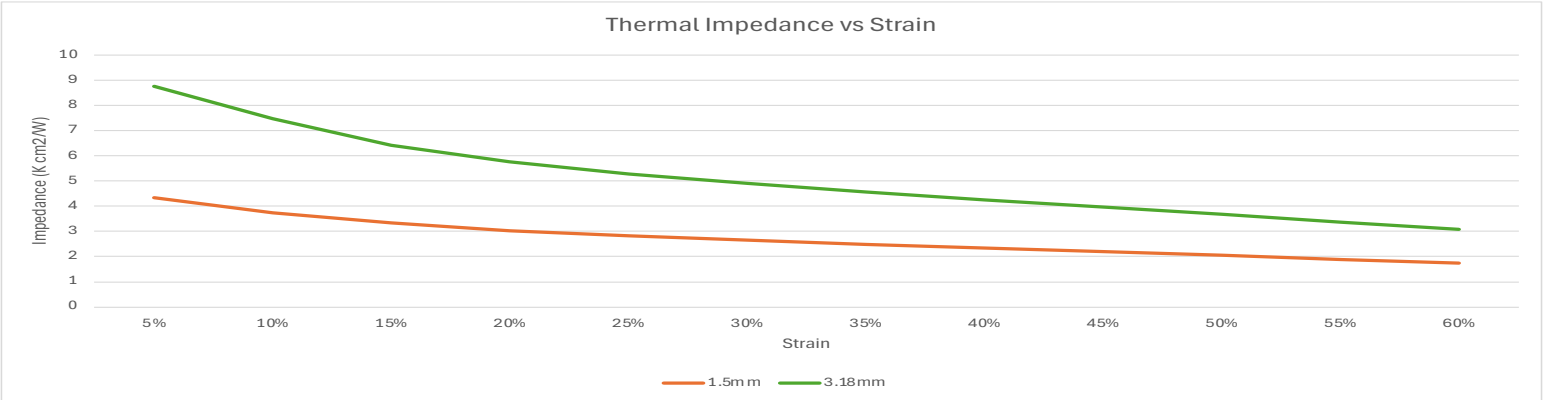



Features:


- Superior Thermal Conductivity
- Excellent Compression Characteristics
- Excellent Wet-Out
- Superb Flexibility
- Excellent Converting Properties
- RoHS and HF Compliant

Applications:

- LED Lighting
- Battery Components
- Infotainment Modules
- Smartphones
- Tablets
- Computers
- Digital Personal Assistants
- Automotive Lighting

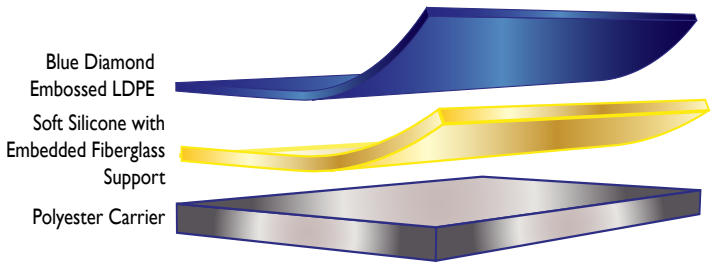

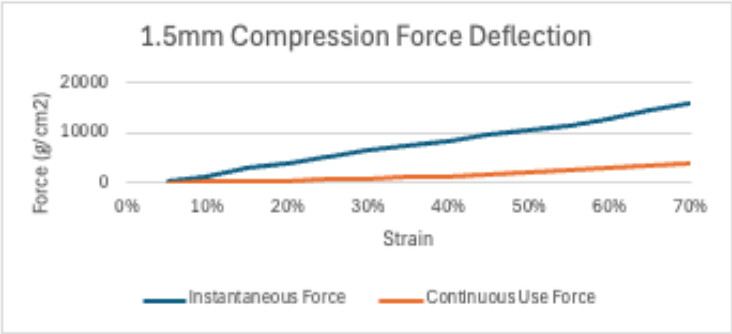

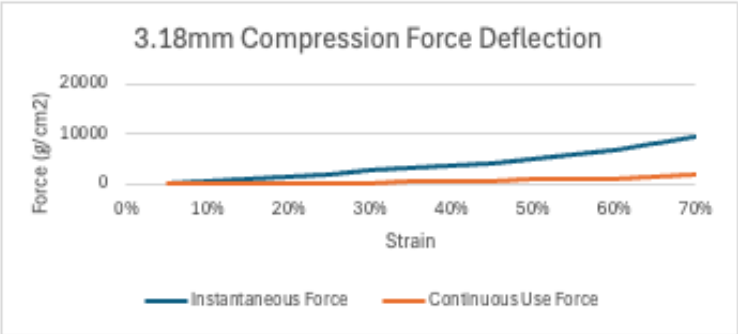

Specific tests should be performed by the end user to determine the product stability for the particular application.

For Additional Information:
E-mail: sales@polymerscience.com
Toll Free: +1 888.533.7004
Web: www.polymerscience.com
Revision: 101326

POLYMER SCIENCE, INC.