



PS-3226

Product Description:


P-SHIELD® PS-3226 is a conductive acrylic adhesive multi-laminate with a soft conductive nickel and copper plated polyurethane foam carrier containing a copper nickel mesh core to provide excellent conductivity in all axes, as well as structure and restitution.

Construction / Properties:

Property	Value	Test Method
Color	Gray	Visual
Total Thickness (excluding liners)	0.2mm - 4.0mm	QSP-726
Total Thickness Tolerance	+/- 20%	--
Acrylic Adhesion	>800 g/25mm	QSP-722
Surface Resistivity	<0.5 Ω /sq	QSP-741
Z-Axis Resistance	<0.5 Ω /in ²	QSP-741
Recommended Application Specification	2 kg/square inch for 2 seconds	--
Continuous Use Conditions	-10 - 80 C	QSP-754

Features:

- Excellent Tack
- Excellent Conductive Properties
- Good Resistance to Heat and Humidity
- Excellent Adhesion to Low Energy Substrates
- Excellent Shielding Effectiveness
- RoHS and HF Compliant

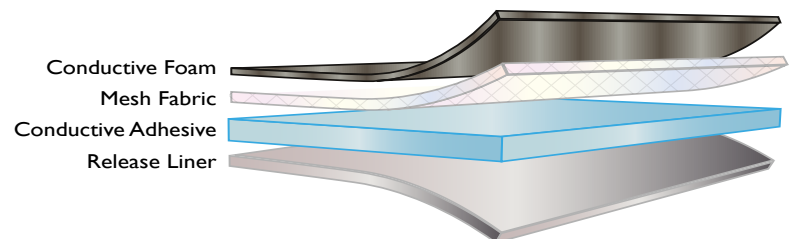

Specific tests should be performed by the end user to determine the product stability for the particular application.

For Additional Information:

E-mail: sales@polymerscience.com
Toll Free: +1 888.533.7004
Web: www.polymerscience.com
Revision: 062524